



PWC IP68

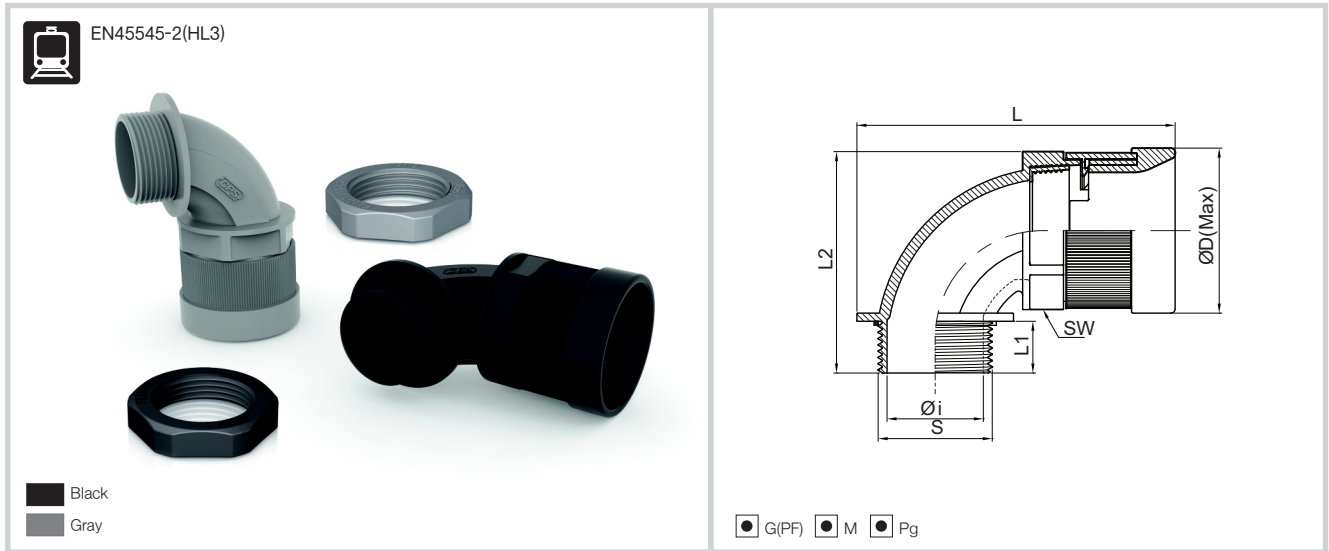

- Material : High Quality Polyamide 6
- Degrees of Protection : IP 68 (EN 60529)
- The max. Instantaneous Temperature : -40°C to +105°C
- Short Term : up to +150° C
- Self-Extinguishing : UL94-HB / Free of Halogen Phosphorous and cadmium
- Color : Black & Gray
- Application : Machine tool, Shipbuilding, Tramway, Industrial / Automatic Machinery, Printing Machine etc. Joint box with connector
- Certification :

» Product size




PF Thread (JIS B0202)

Black	Gray	Thread	Tube Size	S	L1	L2	L	Øi	ØD	SW
PWC-G10B	PWC-G10G	G1/2"	10	20.9	13.0	45.1	60.7	12.0	25.0	19.7
PWC-G12B	PWC-G12G	G1/2"	12	20.9	13.0	45.8	60.8	15.0	27.6	22.8
PWC-G16B	PWC-G16G	G1/2"	16	20.9	13.0	51.4	68.2	15.2	33.0	28.0
PWC-G22B	PWC-G22G	G3/4"	22	26.4	15.0	62.6	85.2	22.0	43.0	37.5
PWC-G28B	PWC-G28G	G1"	28	33.2	15.0	71.6	100.9	27.0	48.8	43.0
PWC-G368B	PWC-G368G	G1 1/4"	28	41.9	15.0	71.6	100.9	30.5	48.8	43.0
PWC-G36B	PWC-G36G	G1 1/4"	36	41.9	19.0	81.3	116.9	33.0	60.6	52.2
PWC-G42B	PWC-G42G	G1 1/2"	48	47.8	19.0	97.0	135.4	40.8	71.8	64.0
PWC-G48B	PWC-G48G	G2"	48	59.6	19.0	97.0	135.4	50.0	71.8	64.0

※ Available in Light Gray production,

(Dimensions in mm)

Ordering No.



Metric Thread (EN 60423)

(Dimensions in mm)

Black	Gray	Thread	Tube Size	S	L1	L2	L	Øi	ØD	SW
PWC-M107B	PWC-M107G	M12 X 1,5	07	12,0	11,0	35,6	47,0	7,5	17,9	14,0
PWC-M10B	PWC-M10G	M12 X 1,5	10	12,0	13,0	45,1	60,7	8,0	25,0	19,7
PWC-M12B	PWC-M12G	M16 X 1,5	12	16,0	13,0	45,8	60,8	12,0	27,6	22,8
PWC-M202B	PWC-M202G	M20 X 1,5	12	20,0	13,0	45,8	60,8	15,0	27,6	22,8
PWC-M16B	PWC-M16G	M20 X 1,5	16	20,0	13,0	51,4	68,2	15,2	33,0	28,0
PWC-M22B	PWC-M22G	M25 X 1,5	22	25,0	15,0	62,6	85,2	20,6	43,0	37,5
PWC-M28B	PWC-M28G	M32 X 1,5	28	32,0	15,0	71,6	100,9	27,0	48,8	43,0
PWC-M36B	PWC-M36G	M40 X 1,5	36	40,0	19,0	81,3	116,9	33,0	60,6	52,2
PWC-M48B	PWC-M48G	M50 X 1,5	48	50,0	19,0	97,0	135,4	42,0	71,8	64,0

Pg Thread (DIN 40430)

Black	Gray	Thread	Tube Size	S	L1	L2	L	Øi	ØD	SW
PWC-P077B	PWC-P077G	Pg07	07	12,5	11,0	35,6	47,0	8,5	17,9	14,0
PWC-P097B	PWC-P097G	Pg09	07	15,2	11,0	35,6	47,0	8,5	17,9	14,0
PWC-P09B	PWC-P09G	Pg09	10	15,2	13,0	45,1	60,7	11,0	25,0	19,7
PWC-P110B	PWC-P110G	Pg11	10	18,6	13,0	45,1	60,7	12,0	25,0	19,7
PWC-P130B	PWC-P130G	Pg13,5	10	20,4	13,0	45,1	60,7	12,0	25,0	19,7
PWC-P11B	PWC-P11G	Pg11	12	18,6	13,0	45,8	60,8	13,0	27,6	22,8
PWC-P132B	PWC-P132G	Pg13,5	12	20,4	13,0	45,8	60,8	15,0	27,6	22,8
PWC-P162B	PWC-P162G	Pg16	12	22,5	13,0	45,8	60,8	15,0	27,6	22,8
PWC-P136B	PWC-P136G	Pg13,5	16	20,4	13,0	51,4	68,2	15,2	33,0	28,0
PWC-P16B	PWC-P16G	Pg16	16	22,5	13,0	51,4	68,2	17,5	33,0	28,0
PWC-P163B	PWC-P163G	Pg16	22	22,5	15,0	62,6	85,2	18,0	43,0	37,5
PWC-P21B	PWC-P21G	Pg21	22	28,3	15,0	62,6	85,2	22,0	43,0	37,5
PWC-P29B	PWC-P29G	Pg29	28	37,0	15,0	71,6	100,9	30,5	48,8	43,0
PWC-P36B	PWC-P36G	Pg36	36	47,0	19,0	81,3	116,9	33,0	60,6	52,2
PWC-P48B	PWC-P48G	Pg48	48	59,3	19,0	97,0	135,4	50,0	71,8	64,0