



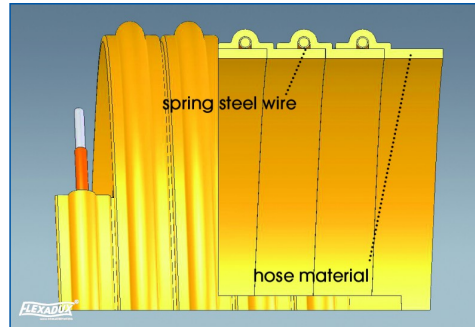

FLEXADUX® P 3 S PU AE

**Flexible and very heavy weight
Polyurethane ducting**

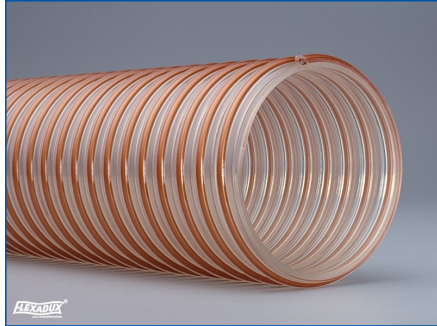

Material:

Polyether-Polyurethane, clear

Single Length:

10 and 15 m

Temperature Resistance:

- 40° up to +100° C

Applications:

Suction and transport of abrasive materials e.g. sand, gravel, grain and other bulk stuff

Properties:

Excellent abrasion and vacuum resistance, good resistance to oils and petrols, very smooth bore, resistance to hydrolysis and microbes, non toxic, food proved according to FDA and EU regulations

TECHNICAL DATA

Dia. (mm)	Weight (kg/m)	Wall Thickness (mm)	Bending radius (mm)	Max. Work. Press. (bar)	Max. Vacuum (bar)
30	0,61	2	130	4,60	0,95
35	0,72	2	140	4,30	0,95
40	0,76	2	160	4,20	0,95
45	0,90	2	180	4,00	0,95
50	1,00	2	200	3,80	0,95
60	1,32	2	240	3,30	0,95
70	1,45	2	280	3,00	0,95
75	1,51	2	300	2,70	0,95
80	1,61	2	320	2,40	0,90
90	1,81	2	360	2,10	0,90
100	2,13	2	400	1,90	0,90
110	2,34	2	440	1,75	0,90
120	2,47	2	480	1,50	0,90
125	2,56	2	500	1,45	0,90
130	3,27	2	520	1,40	0,90
140	3,52	2	560	1,30	0,90
150	4,08	2	600	1,25	0,85
160	4,35	2	640	1,10	0,85
175	4,40	2	700	1,00	0,85
180	4,50	2	720	1,00	0,85
200	5,45	2	800	0,95	0,85
225	5,68	2	900	0,85	0,85
250	5,90	2	1000	0,85	0,75
300	6,20	2	1200	0,75	0,40
350	7,10	2	1400	0,60	0,30

Further diameters available upon request!

Technical data are based on + 23° C.



SCHAUENBURG RUHRKUNSTSTOFF GMBH

Weseler Str. 35 · 45478 Mülheim-Ruhr · Germany · Tel. +49 (0) 2 08 99 91-0 · Fax +49 (0) 2 08 5 33 74 · mail@schauenburg-rk.com