



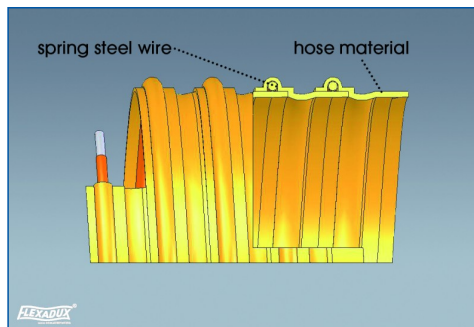

FLEXADUX® P 3 SV PU

**Flexible and very heavy weight
Polyurethane ducting**

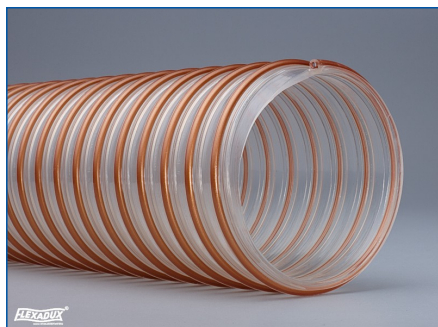

Material:

Polyester-Polyurethane, clear

Single Length:

10 m

Temperature Resistance:

- 40° up to +100° C

Applications:

Suction and transport of abrasive materials e.g. sand, pebbles, grain or other bulk stuff.

Conveying of roof gravel or substratum, as head hose for suction trucks, in agriculture, for silo loading

Properties:

Excellent abrasion and vacuum resistance, good resistance to oil and petrol fumes, very smooth bore, good flexibility

Special Constructions:

- P 3 SV PU AE: resistance to hydrolysis and microbes, non toxic, food proved according to FDA and EU regulations.

- P 3 SV PU AS: antistatic ($R \leq 10^8$ Ohm), conform to TRBS 2153

TECHNICAL DATA

Dia. (mm)	Weight (kg/m)	Wall Thickness (mm)	Bending radius (mm)	Max. Work. Press. (bar)	Max. Vacuum (bar)
40	1,10	2,5	100	3,50	0,85
45	1,22	2,5	113	3,30	0,85
50	1,35	2,5	125	3,25	0,85
60	1,62	2,5	150	3,20	0,85
70	1,89	2,5	175	3,00	0,80
75	1,95	2,5	188	2,50	0,80
80	2,08	2,5	200	2,20	0,80
90	2,34	2,5	225	2,00	0,70
100	2,59	2,5	250	1,65	0,70
110	2,85	2,5	275	1,50	0,70
120	3,10	2,5	300	1,45	0,65
130	3,28	2,5	325	1,30	0,65
140	3,53	2,5	350	1,25	0,55
150	3,72	2,5	375	1,15	0,55
160	3,97	2,5	400	1,00	0,50
180	4,19	2,5	450	0,90	0,50
200	4,40	2,5	500	0,85	0,41
225	4,95	2,5	563	0,80	0,35
250	5,50	2,5	625	0,60	0,32
300	6,70	2,5	750	0,50	0,30
350	7,81	2,5	875	0,40	0,20
400	8,90	2,5	1000	0,25	0,15

Further diameters available upon request!

Technical data are based on + 23° C.



SCHAUENBURG RUHRKUNSTSTOFF GMBH

Weseler Str. 35 · 45478 Mülheim-Ruhr · Germany · Tel. +49 (0) 2 08 99 91-0 · Fax +49 (0) 2 08 5 33 74 · mail@schauenburg-rk.com