

# C199



## SOLID CONTROL HANDWHEEL WITH FOLDAWAY REVOLVING HANDLE

### Material:

Reinforced and stabilised polyamide.  
Oils and greases resistant.

### Surface:

Satin.

### Colour:

Black (RAL 9011).

### Central Cap:

Grey polyamide (RAL 7035 cod. 13).

### Alternative Cap Colour:

Orange (RAL 2004 cod. 02)  
Blue (RAL 5015 cod. 07)  
Yellow (RAL 1021 cod. 10)  
Red (RAL 3000 cod. 16)  
Green (RAL 6024 cod. 17)  
Black (RAL 9011 cod. 01)

### Main Insert:

Zinc plated steel insert with smooth through-hole (H10 tolerance).


### Side Handle:

Flush, foldaway revolving handle, with hexagonal connection. Reinforced polyamide black handle. Black-oxide treated internal mechanism. Fixed with black-oxide treated hexagon socket button head screw ISO 7838.

For fixing system, or execution of keyway or square holes, please refer to the technical notes attached to the catalogue.

### SPECIAL REQUEST:

- Upon request and for a minimum of 50 pieces inserts can be supplied with hole d1 with tolerance H7 and black oxide treated surface. Add letters **ZB** to the standard code. Example: **C199ISO.TD1401PZB**.
- It's possible to supply the inserts with d1 bore by customer design, on request and for quantities.
- It's possible to supply the inserts in different material and treatment-finishes, on request and for quantities.
- It's possible to supply the products with colours (reduced range) as shown in the table at page C-11, on request and for quantities.

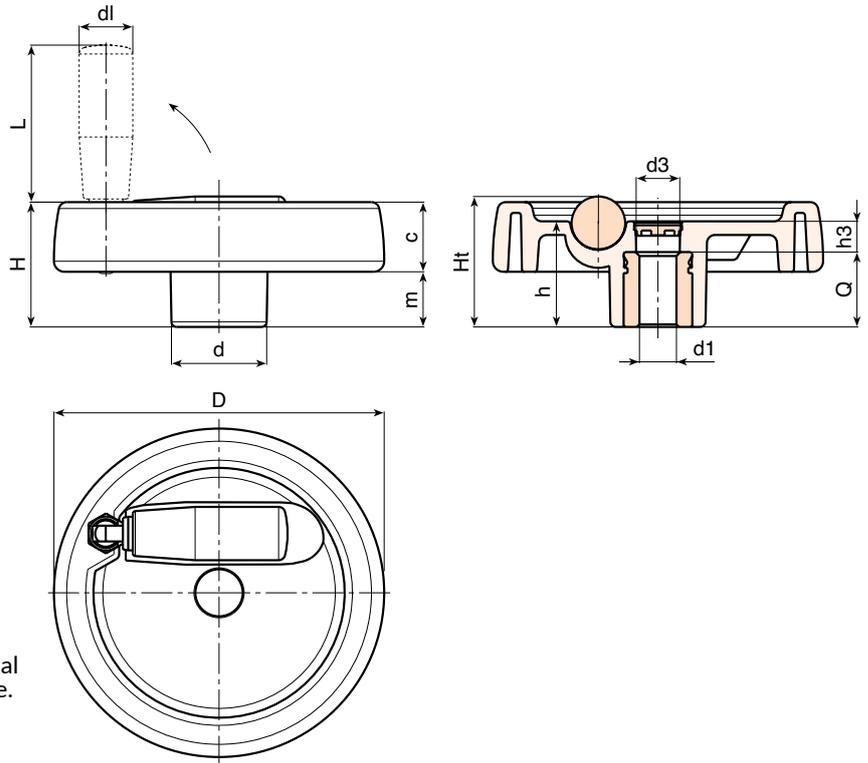

Version with zinc plated insert and H10 tolerance bore

	Art.	D	H	Ht	h	d	m	c	d3	h3	dl	L	Dm	d1 H10	Q	g
●	<b>C199125.TP0501P</b>	<b>124</b>	48	49,5	40	36	21,5	26,5	15	16	20	38	18	<b>05</b>	24	349
●	<b>C199125.TD1201P</b>	<b>124</b>	48	49,5	40	36	21,5	26,5	15	16	20	38	18	<b>12</b>	24	343
●	<b>C199150.TD0801P</b>	<b>149</b>	53	-	44	38	24,5	28,5	26	12	20	58	22	<b>08</b>	32	500
●	<b>C199150.TD1401P</b>	<b>149</b>	53	-	44	38	24,5	28,5	26	12	20	58	22	<b>14</b>	32	493
●	<b>C199150.TD2001P</b>	<b>149</b>	53	-	44	38	24,5	28,5	26	12	20	58	22	<b>20</b>	32	488
●	<b>C199175.TD0801P</b>	<b>174</b>	58	-	48	40	24,5	33,5	26	16	26	80	28	<b>08</b>	32	715
●	<b>C199175.TD1601P</b>	<b>174</b>	58	-	48	40	24,5	33,5	26	16	26	80	28	<b>16</b>	32	707
●	<b>C199200.TD0801P</b>	<b>198</b>	63	-	53	44	24,5	38,5	26	17	27	90	28	<b>08</b>	36	1015
●	<b>C199250.TD0801P</b>	<b>250</b>	67	-	58	60	29	38	36	22	27	90	28	<b>08</b>	36	1500

**Attention:** bore d1 (H7 tolerance) could be produced by request, with 50 pieces minimum.

**Dm** = It's possible to increase the hole, by boring, until Dm (enlarge).

**A.R.** = By request