





Brake Option




Rapid Drain



Delicate Contact



Speed 1m/sec



Temperature -20/+60°C

- ✓ Fast directional change - Easier steering than traditional casters.
- ✓ Glide smoothly over carpet, wood & marble floors.
- ✓ Multiple drain channels expel debris & fluids.
- ✓ Effortlessly convey delicate materials with minimal damage.

Optional Fixing Kits

Wood Insert Fixing

Nut & Washer Fixing

MODEL	OC30 OC30F			OC35 OC50 OC55 OC55B			OC100 OC100B		
FIXING	T8	N8		T10	N10		T12	N12	
A	22.2	14.4	16	25	18.9	20	27	21.1	24
B	9.1	13	8	11.2	17	10	14	19	12
C	11	8	1.6	13.1	10	2	14	12	2.5
D	M8 x 1.25	M8 x 1.25		M10 x 1.5	M10 x 1.5		M12 x 1.75	M12 x 1.75	
E	1.3	-	-	1.4	-	-	1.8	-	-

Metric dimensions subject to general tolerance of +/- 0.3mm


OC50

Fixing Options




Debris Exit

PART	OC50
MAX LOAD	60 kg
BALL Ø	50
A	75
B	77
C	17.8
D	44
E	25
F	M10 x 1.5

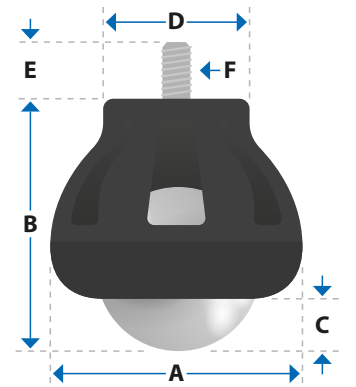


OC55 & OC55B

Fixing Options



Brake Option

PART	OC55 & OC55B
MAX LOAD	60 kg
BALL Ø	50
A	76
B	84
C	14
D Ø	41.5
E	15
F	M10 x 1.5
G	34.5 (OC55)
G ▶	26.4 (OC55B)

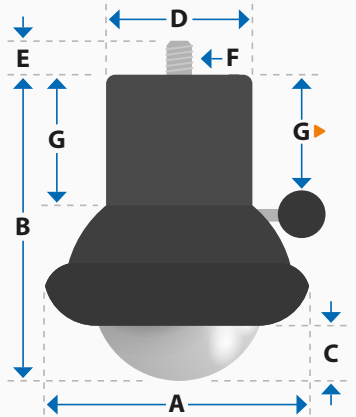

OC30 & OC30F




Fixing Options



Push Fit

PART	OC30 & OC30F *
MAX LOAD (kg)	30
BALL Ø	35
A	63.8
B / B *	53.5 / 52 *
C / C *	9 / 7.5 *
D / D ▶	25 / 32 ▶
E / E ▶	13 / 18 ▶

Values using Quick Fit adaptors
* Fixed / Non rolling caster

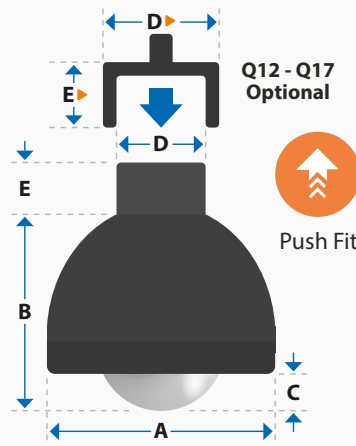

Quick Fit Adaptors




OC35

Fixing Options



Debris Exit

PART	OC35
MAX LOAD (kg)	30
BALL Ø	35
A	60
B	60
C	9.6
D Ø	44
E	25
F	M10 x 1.5

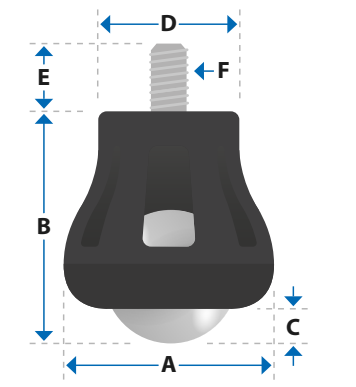


OC100 & OC100B



PART	OC100 & OC100B
MAX LOAD	80 kg
BALL Ø	104
A	143
B	151.5
C	29
D Ø	58
E	25
F	M12 x 1.75
G	46 (OC100)
G ▶	34 (OC100B)

Metric dimensions subject to general tolerance of +/- 0.3mm

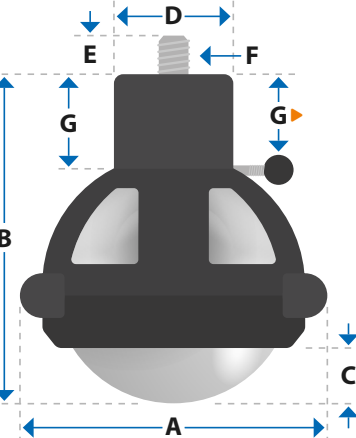

Debris Exit



Brake Option

Fixing Options

