## ET-EG ROD SERIES (LIGHT PERFORMANCE)

**Material:**
Galvanized steel or **AISI 304 stainless Steel**
**Swivel Pivot:**
Galvanized steel or **AISI 303 stainless Steel**
**Riveted Pivots and rod:**
Galvanized steel or **AISI 304 stainless Steel**
**Performance:**
Form ET is supplied with a T-shaped rod and a hooking bracket.
Form EG is supplied with a eye-bolt rod and a hooking bracket.

## SERIES ET

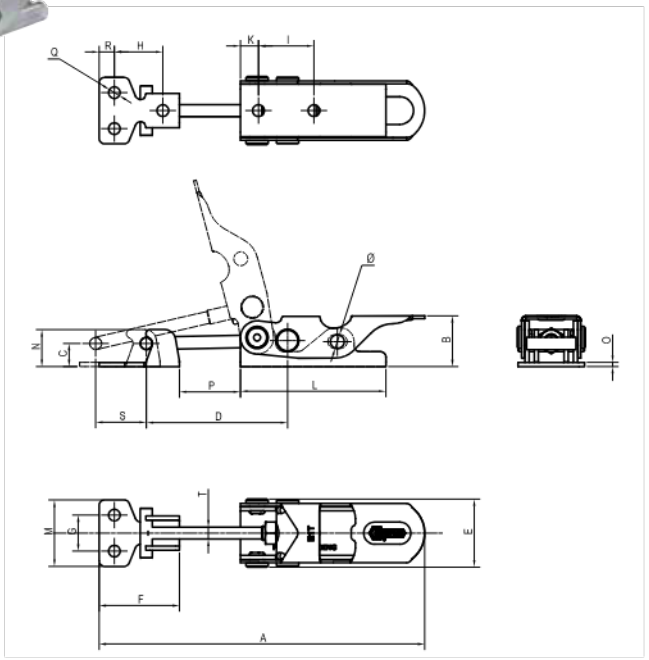


## SERIES EG

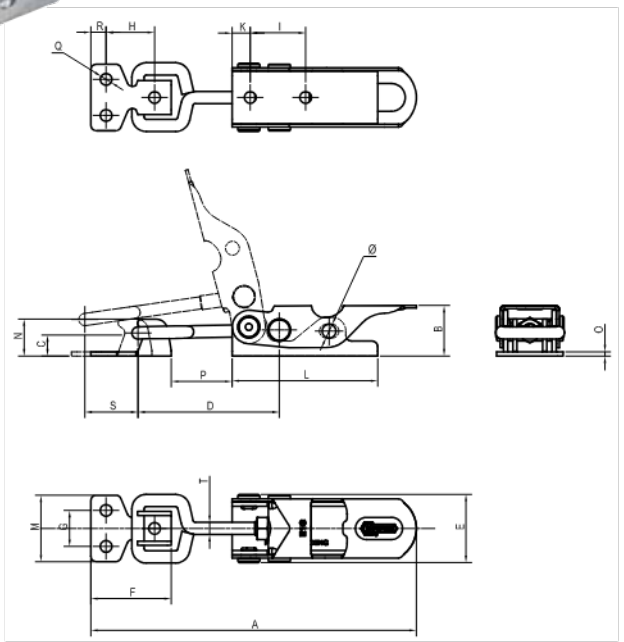


| Code | Description | Stainless steel Code | Description | A | B | C | D | E | F | G | H | I | K | L | M | N | O | P | Q | R | S | T | Diam. | Fh (daN) | gr. |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **AE1020** | E1T | **ES1020** | E1TX | 117,5 | 18 | 8,3 | 51÷58 | 25 | 29 | 13 | 17,5 | 20 | 6,5 | 52,5 | 24 | 13,3 | 1,5 | 22÷29 | 4,2 | 5,5 | 11 | M5 | 5 | 100 | 61 |
| **AE2020** | E2T | **ES2020** | E2TX | 155,5 | 25 | 10 | 64÷75 | 31 | 42 | 15 | 24 | 24,5 | 8 | 65 | 32 | 16,4 | 2 | 28÷39 | 5,2 | 10 | 13 | M6 | 6 | 200 | 135 |
| **AE3020** | E3T | **ES3020** | E3TX | 189,5 | 32 | 12,7 | 79,5÷92 | 36 | 52 | 20 | 29,5 | 30 | 11 | 81,5 | 38 | 20,7 | 2,5 | 33÷45,5 | 6,5 | 12,5 | 16 | M8 | 8 | 300 | 256 |

| Code | Description | Stainless steel Code | Description | A | B | C | D | E | F | G | H | I | K | L | M | N | O | P | Q | R | S | T | Diam. | Fh (daN) | gr. |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **AE1010** | E1G | **ES1010** | E1GX | 117,5 | 18 | 8,3 | 51÷58 | 25 | 29 | 13 | 17,5 | 20 | 6,5 | 52,5 | 24 | 13,3 | 1,5 | 22÷29 | 4,2 | 5,5 | 12 | M5 | 5 | 100 | 63 |
| **AE2010** | E2G | **ES2010** | E2GX | 155,5 | 25 | 10 | 64÷75 | 31 | 42 | 15 | 24 | 24,5 | 8 | 65 | 32 | 16,4 | 2 | 28÷39 | 5,2 | 10 | 14 | M6 | 6 | 200 | 142 |
| **AE3010** | E3G | **ES3010** | E3GX | 189,5 | 32 | 12,7 | 79,5÷92 | 36 | 52 | 20 | 29,5 | 30 | 11 | 81,5 | 38 | 20,7 | 2,5 | 33÷45,5 | 6,5 | 12,5 | 18 | M8 | 8 | 300 | 270 |

## SERIES ETL

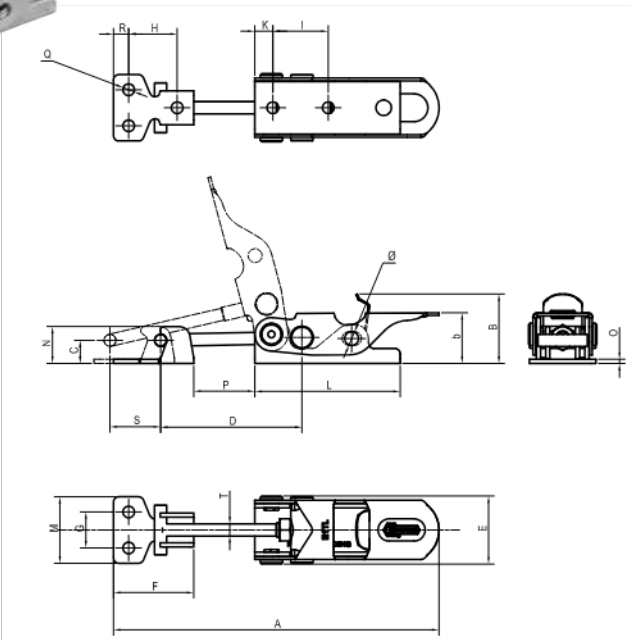


## SERIES EGL

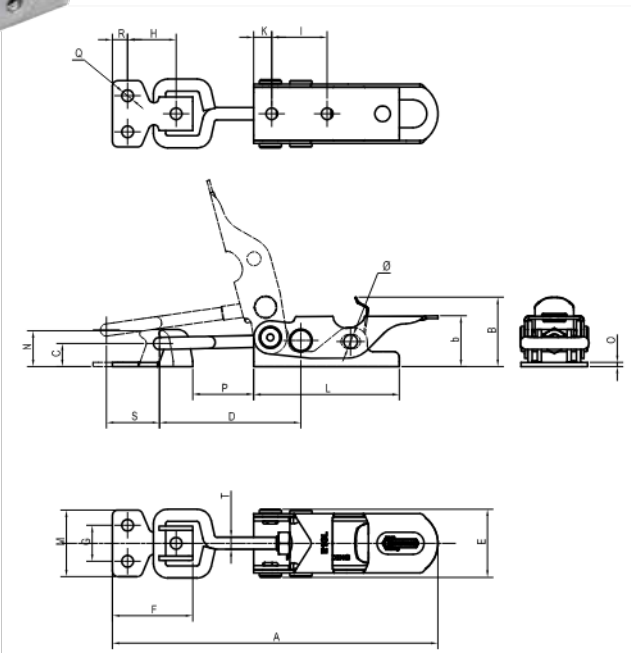


### ETL-EGL ROD SERIES (LIGHT PERFORMANCE)

The sizes of this series are also produced in stainless steel and are shown below in red.
The main feature of this series is the special safety lever with the purpose of preventing any accidental openings caused by vibrations.

**Material:**
Galvanized steel or **AISI 304 stainless Steel**
**Swivel Pivot:**
Galvanized steel or **AISI 303 stainless Steel**
**Riveted Pivots and rod:**
Galvanized steel or **AISI 304 stainless Steel**
**Performance:**
Form ETL is supplied with a T-shaped rod and a hooking bracket.
Form EGL is supplied with a eye-bolt rod and a hooking bracket

| Code | Description | Stainless steel Code | Description | A | b | B | C | D | E | F | G | H | I | K | L | M | N | O | P | Q | R | S | T | Diam. | Fh (daN) | gr. |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| AE1120 | E1TL | ES1120 | E1TLX | 117,5 | 18 | 25 | 8,3 | 51÷58 | 25 | 29 | 13 | 17,5 | 20 | 6,5 | 52,5 | 24 | 13,3 | 1,5 | 22÷29 | 4,2 | 5,5 | 11 | M5 | 5 | 100 | 62 |
| AE2120 | E2TL | ES2120 | E2TLX | 155,5 | 25 | 33 | 10 | 64÷75 | 31 | 42 | 15 | 24 | 24,5 | 8 | 65 | 32 | 16,4 | 2 | 28÷39 | 5,2 | 10 | 13 | M6 | 6 | 200 | 136 |
| AE3120 | E3TL | ES3120 | E3TLX | 189,5 | 32 | 41,5 | 12,7 | 79,5÷92 | 36 | 52 | 20 | 29,5 | 30 | 11 | 81,5 | 38 | 20,7 | 2,5 | 33÷45,5 | 6,5 | 12,5 | 16 | M8 | 8 | 300 | 258 |

| Code | Description | Stainless steel Code | Description | A | b | B | C | D | E | F | G | H | I | K | L | M | N | O | P | Q | R | S | T | Diam. | Fh (daN) | gr. |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| AE1110 | E1GL | ES1110 | E1GLX | 117,5 | 18 | 25 | 8,3 | 51-58 | 25 | 29 | 13 | 17,5 | 20 | 6,5 | 52,5 | 24 | 13,3 | 1,5 | 22-29 | 4,2 | 5,5 | 12 | M5 | 5 | 100 | 65 |
| AE2110 | E2GL | ES2110 | E2GLX | 155,5 | 25 | 33 | 10 | 64-75 | 31 | 42 | 15 | 24 | 24,5 | 8 | 65 | 32 | 16,4 | 2 | 28-39 | 5,2 | 10 | 14 | M6 | 6 | 200 | 143 |
| AE3110 | E3GL | ES3110 | E3GLX | 189,5 | 32 | 41,5 | 12,7 | 79,5-92 | 36 | 52 | 20 | 29,5 | 30 | 11 | 81,5 | 38 | 20,7 | 2,5 | 33-45,5 | 6,5 | 12,5 | 18 | M8 | 8 | 300 | 273 |

## ET T-shaped rod

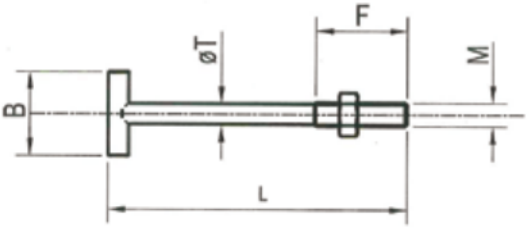

## EG Eye bolt rod

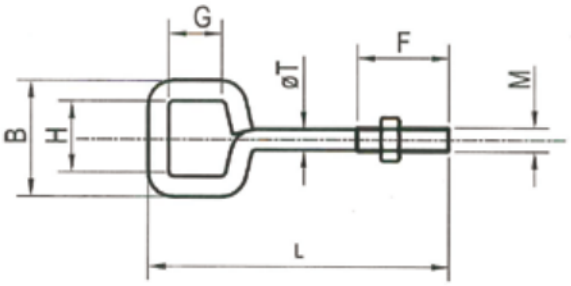


| Code | Description | Stainless steel Code | Description | B | F | G | H | L | M | T |
|---|---|---|---|---|---|---|---|---|---|---|
| **AX642** | E1T-E1TL | **AX648** | E1TX-E1TLX | 18 | 20 | | | 64 | M5 | 4,4 |
| **AX644** | E2T-E2TL | **AX650** | E2TX-E2TLX | 24 | 25 | | | 84 | M6 | 5,2 |
| **AX646** | E3T-E3TL | **AX652** | E3TX-E3TLX | 30 | 30 | | | 102 | M8 | 7 |

| Code | Description | Stainless steel Code | Description | B | F | G | H | L | M | T |
|---|---|---|---|---|---|---|---|---|---|---|
| **AX630** | E1G-E1GL | **AX636** | E1GX-E1GLX | 25 | 20 | 12 | 16 | 64 | M5 | 4,4 |
| **AX632** | E2G-E2GL | **AX638** | E2GX-E2GLX | 31 | 25 | 15 | 20,4 | 83 | M6 | 5,2 |
| **AX634** | E3G-E3GL | **AX640** | E3GX-E3GLX | 42 | 30 | 18,4 | 28 | 102 | M8 | 7 |