
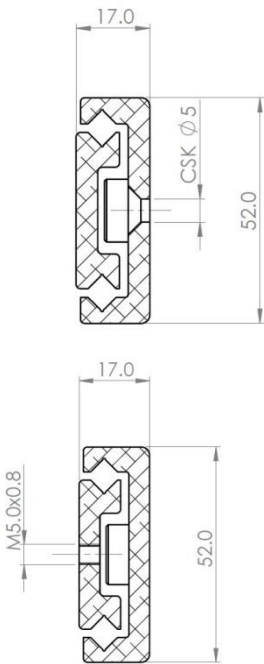


# TELESCOPIC SLIDES

## Type: 5217

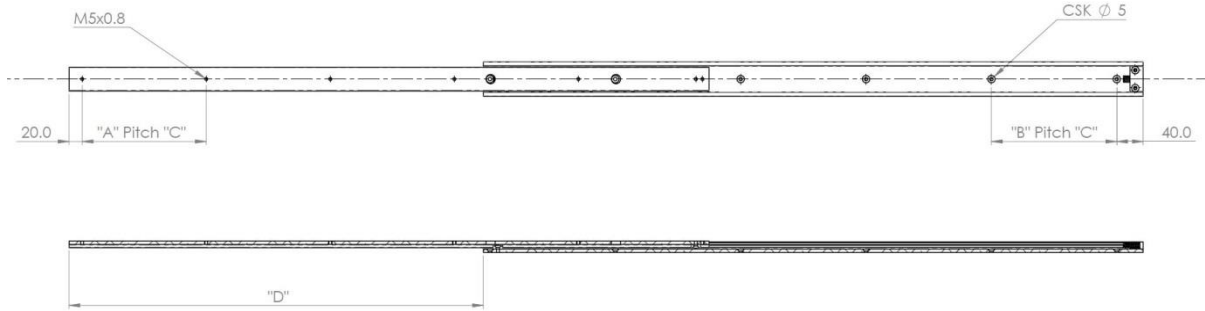

Configuration Table						
Part Number	Installation Length "L"	Extension Length "D"	Load Per Pair (kg)	Drill Table		
				"A"	"B"	"C"
4013.5217.0300	300	138	72	120	125	3
4013.5217.0350	350	188	81	145	150	3
4013.5217.0400	400	238	90	113.3	116.7	4
4013.5217.0450	450	288	96	130	133.3	4
4013.5217.0500	500	268	112	110	112.5	5
4013.5217.0550	550	318	108	122.5	125	5
4013.5217.0600	600	368	114	135	137.5	5
4013.5217.0650	650	418	104	118	120	6
4013.5217.0700	700	468	94	128	130	6
4013.5217.0750	750	518	85	138	140	6
4013.5217.0800	800	568	80	148	150	6
4013.5217.0850	850	478	75	158	160	6
4013.5217.0900	900	528	70	168	170	6
4013.5217.0950	950	578	65	178	180	6
4013.5217.1000	1000	628	60	188	190	6

### Mounting details

Refer to drill table hole pitches



We recommend use the major axis, do not dismantle the slide! The maximum safe load is given for a fully extended pair of slides, mounted on the major axis, with a load spread uniformly along the inner beam.

- Anodised aluminium 6005A milled ball race for accuracy
- Caged cross roller bearings for smooth, deflection free extension
- Unique design eliminates brinelling/bearing indentation on the raceways
- Standard lengths and extensions 300-1000mm
- Special lengths, drillings and surface finish upon request
- Silent, lightweight and corrosion resistant