




FLEXADUX® P-G-EX 1

**Light weight and very flexible
exhaust gas ducting of
TPE-coated-polyester fabric**

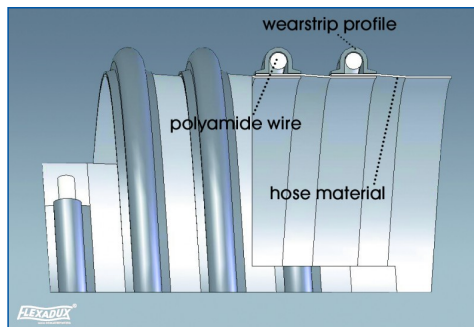

Material:

TPE-coated polyester fabric, black

Helix:

PA 6.6, heat-stabilized Wear Strip Profile: TPE, black (coloured profile available upon request)

Temperature Resistance:

- 40° up to + 150° C (intermittent + 170° C)

Single Length:

Up from 2,5 to 20 m available

Applications:

Suction of exhaust gases in over-floor applications with reel systems or suction channels

Properties:

Excellent chemical resistance, especially against oil and petrol fumes, crush recoverable

Special construction:

- P-G-EX 2: with spring steel wire

TECHNICAL DATA

Dia. (mm)	Weight (kg/m)	Wall Thickness (mm)	Bending radius (mm)	Max. Vacuum (bar)
40	0,25	0,4	80	0,65
50	0,41	0,4	85	0,50
65	0,53	0,4	100	0,35
70	0,61	0,4	105	0,20
75	0,69	0,4	105	0,15
80	0,74	0,4	160	0,12
90	0,83	0,4	175	0,12
100	0,87	0,4	190	0,10
125	1,20	0,4	250	0,08
150	1,44	0,4	300	0,06
200	1,83	0,4	400	0,04
250	2,29	0,4	500	0,02

Further diameters available upon request!

Technical data are based on + 23° C.



SCHAUBURG RUHRKUNSTSTOFF GMBH

Weseler Str. 35 · 45478 Mülheim-Ruhr · Germany · Tel. +49 (0) 2 08 99 91-0 · Fax +49 (0) 2 08 5 33 74 · mail@schauenburg-rk.com