




FLEXADUX® P 4 NEO I

Light weight, single-ply Neoprene ducting

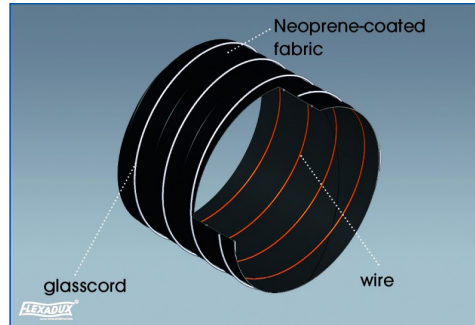

Material:

Neoprene- coated glass fabric, 1-ply, black

Single Length:

4 m, special lengths available on request

Temperature Resistance:

- 35°C up to + 135°C (interm. up to + 150°C)

Applications:

Suction and transport of air and gases in plastic industry, vehicle and engine construction

Properties:

Very good flexibility, good chemical resistance, smooth bore, UV- resistant

Special Construction:

- With spiral free cuffs / with polyester- fabric

TECHNICAL DATA

ID (mm)	OD (mm)	Weight (kg/m)	Bend. Radius (mm)	max. Work.press. (bar)	max. Vacuum (bar)
13	15,0	0,07	7	1,50	0,53
19	21,0	0,08	9	1,50	0,53
25	27,0	0,12	12	1,40	0,53
32	34,0	0,13	16	1,40	0,50
38	40,6	0,17	19	1,40	0,50
41	43,6	0,18	21	1,30	0,45
51	53,6	0,25	25	1,20	0,44
55	57,6	0,27	27	1,10	0,44
60	62,6	0,30	30	1,10	0,40
63	65,6	0,32	31	1,10	0,40
65	67,6	0,34	33	1,10	0,40
70	73,1	0,40	35	1,10	0,35
76	79,1	0,41	38	1,00	0,35
80	82,1	0,44	40	1,00	0,30
83	86,1	0,47	41	1,00	0,30
90	92,1	0,49	45	0,90	0,30
102	105,1	0,57	51	0,90	0,26
110	113,1	0,69	56	0,80	0,21
120	124,1	0,76	60	0,80	0,19
127	130,1	0,80	63	0,80	0,17
140	143,1	0,89	70	0,80	0,15
152	155,6	1,05	76	0,80	0,15
160	163,9	1,09	80	0,60	0,12
178	182,1	1,21	89	0,60	0,10
180	184,1	1,24	95	0,60	0,10
203	207,1	1,38	101	0,50	0,70
229	233,6	1,49	114	0,40	0,06
254	258,6	1,65	127	0,40	0,05
305	309,6	2,00	152	0,10	0,03

Further diameters available upon request!

Technical data are based on + 23° C.



SCHAUBURG RUHRKUNSTSTOFF GMBH

Weseler Str. 35 · 45478 Mülheim-Ruhr · Germany · Tel. +49 (0) 2 08 99 91- 0 · Fax +49 (0) 2 08 5 33 74 · mail@schauenburg-rk.com