
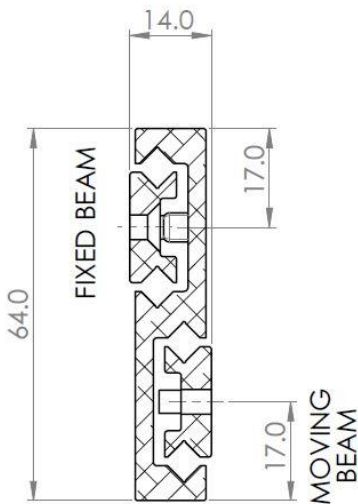


# TELESCOPIC SLIDES

## Type: 6414

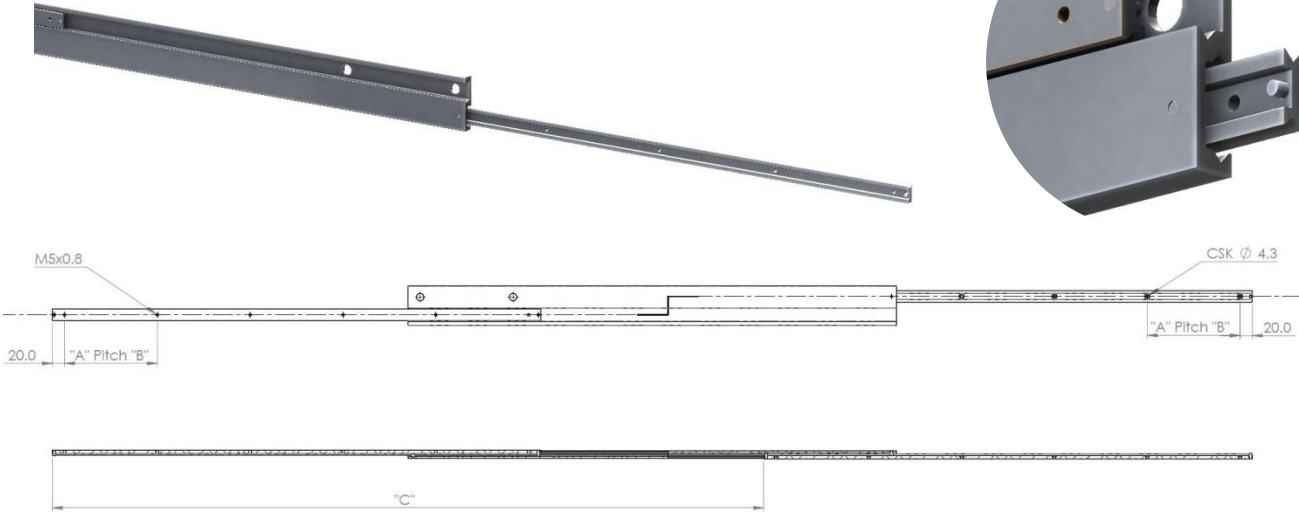

Configuration Table					
Part Number	Installation Length "L"	Extension Length "C"	Load Per Pair (kg)	Drill Table	
				"A"	"B"
4013.6414.0300	300	325	25	130	3
4013.6414.0350	350	425	20	155	3
4013.6414.0400	400	525	21	120	4
4013.6414.0450	450	465	30	136.5	4
4013.6414.0500	500	565	28	115	5
4013.6414.0550	550	665	22	127.5	5
4013.6414.0600	600	765	21	140	5
4013.6414.0650	650	865	20	122	6
4013.6414.0700	700	965	18	132	6
4013.6414.0750	750	1065	15	142	6
4013.6414.0800	800	1165	10	152	6

### Mounting details

Refer to drill table hole pitches



We recommend use the major axis, do not dismantle the slide! The maximum safe load is given for a fully extended pair of slides, mounted on the major axis, with a load spread uniformly along the inner beam.

- Anodised aluminium 6005A milled ball race for accuracy
- Caged cross roller bearings for smooth, deflection free extension
- Unique design eliminates brinelling/bearing indentation on the raceways
- Standard lengths and extensions 300-1000mm
- Special lengths, drillings and surface finish upon request
- Silent, lightweight and corrosion resistant